

**Municipal Equipment, Inc.**  
 313 Jenso Drive  
 Knoxville, Tn. 37912  
 800-248-7590  
 Fax: 502-962-6499  
 mequip@iglou.com

**QUOTE**

Number: 1-6-17-11  
 Date: 1-6-17  
 Page: 1

**To:**  
 Kevin Music  
 City of Crossville  
 376 Sparta Hwy  
 Crossville, TN

**Ship To:**

Delivery	Sales Rep	FOB	Ship Via	Terms	Sales Tax	Excise Tax
In-Stock	Charlie Akers	Crossville, TN	BW	Net 15 days	INCLUDED: NOT INCLUDED: x	INCLUDED: NOT-INCLUDED: x

QTY	Description	Unit Price	Total Price
1	GVM 6600-LCT trailer leaf vac 84 HP John Deere Hydraulic boom 18" dia. Intake hose - Heavy Duty Type LED lights 90° inlet elbow PTO safety engagement system	\$32,510.00	
1	GVM 500.10 Collector Box 10' long box 72"H x 78"W Per attached description  Note: other sizes available to fit your dump truck - Please advise length of bed for quote.	+\$7,600.00	


MUNICIPAL EQUIPMENT, INC.

ACCEPTED BY \_\_\_\_\_ DATE \_\_\_\_\_

SUBTOTAL	
TAX	
FREIGHT	
MISCELLANEOUS	
BALANCE DUE	

# **GVM-6600-LCT**


## **Debris Collector**

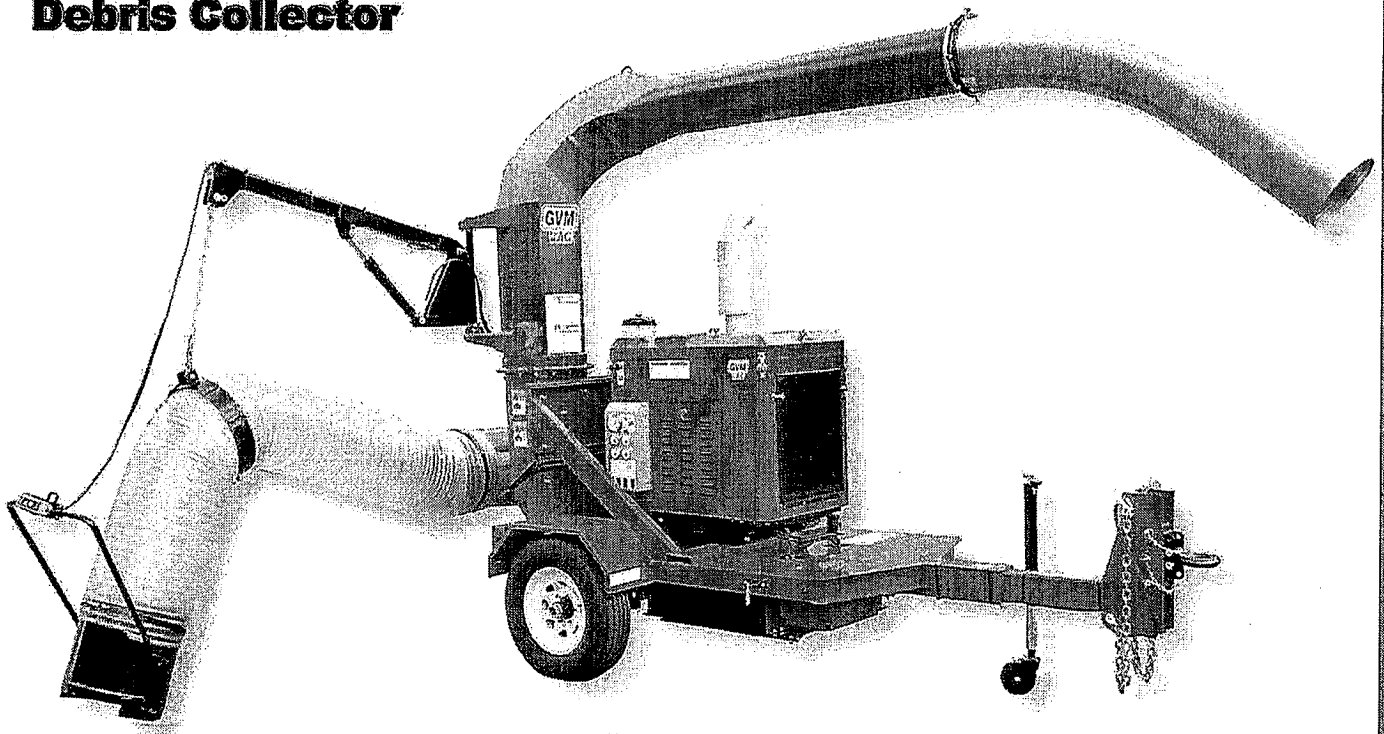

# **GVM**

# **VAC**

- **John Deere Diesel Engine**  
4045T 74HP Interim Tier 4
- **29.5" Impeller**  
Four 3/4" thick Blades
- **18" Diameter Intake Hose**  
10 Foot Long
- **Hydraulic Hose Boom**  
easier leaf vacuuming

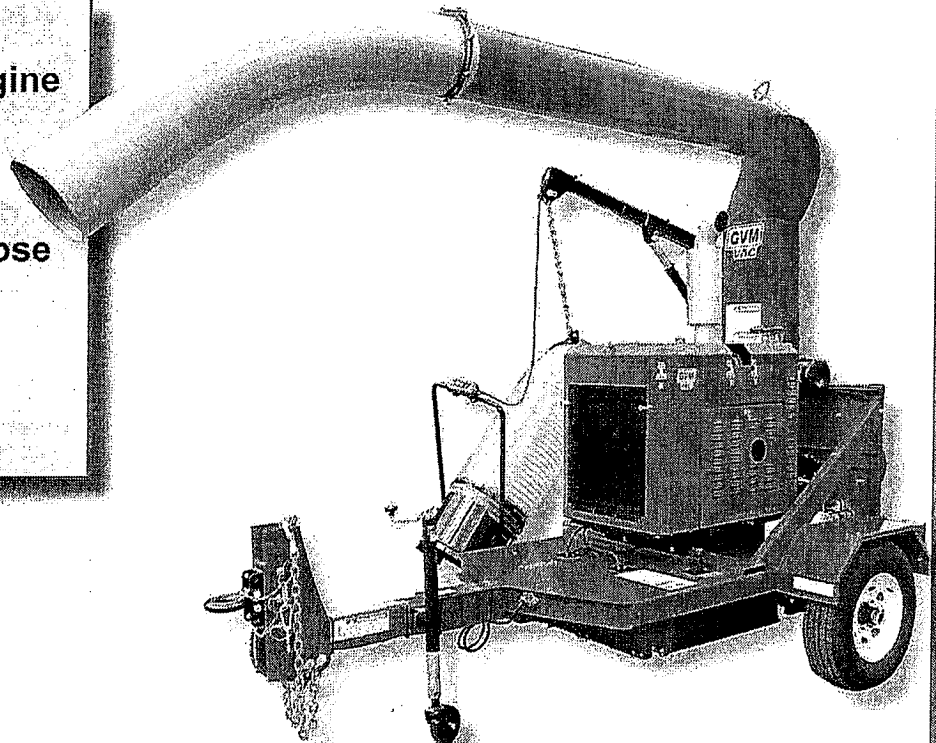

[www.gvm-vac.com](http://www.gvm-vac.com)



### GVM-VAC COLLECTOR BOXES

#### MODEL

#### DESCRIPTION

72" high x 78" wide (81" wide outside dimension)  
Construction consists of 3/16" x 1-1/2" angle frame fitted with 12-ga. steel panels  
Top of box is fitted with expanded metal  
Single rear door is hinged from the top with four cleave type hinges with 3/4" pins  
Rear door is equipped with flexible rubber leaf box connector and tube support  
Rear over-center latch mechanism secures the rear door  
The rear door has a crossbar to keep it securely closed  
Four lifting eyes are provided as well as a total of eight mounting loops  
Interior of box is equipped with a rubber deflector  
Delivered fully assembled ready for operation  
Painted: Standard white color

GVM500.8 8' long box 72" H x 78" W

GVM500.9 9' long box 72" H x 78" W

GVM500.10 10' long box 72" H x 78" W


GVM500.11 11' long box 72" H x 78" W

GVM500.12 12' long box 72" H x 78" W

GVM500.13 13' long box 72" H x 78" W

GVM500.14 14' long box 72" H x 78" W


Special paint color other than standard white

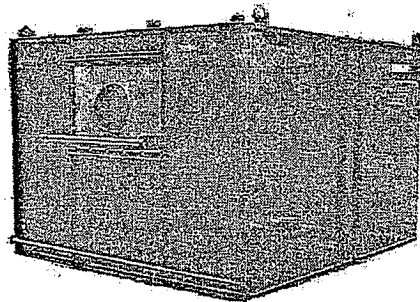


# GVM-6600-LGT Basic Specifications

<b>Engine</b>	John Deere 4045T diesel four cylinder water cooled diesel engine; 74HP certified for Interim Tier 4 emissions.
<b>Air Cleaner</b>	Dry element with pre-cleaner.
<b>Radiator</b>	Pressurized, heavy duty. Trash style with 6-blade fan.
<b>Radiator Screen</b>	Secondary radiator screen constructed of 1" expanded metal and 1/8" hardware cloth.
<b>Engine Controls</b>	Gauges include: Tachometer, hour meter and Murphy engine safety shutdown system. 12-volt battery system.
<b>Sheet Metal</b>	Fully enclosed custom engine compartment with louvered side doors.
<b>PTO</b>	Heavy duty 13" clutch with side load PTO.
<b>Fuel Tank</b>	40-gallon cross-link polyethylene fuel tank.
<b>Trailer</b>	Trailer deck is formed 1/4" thick steel.
<b>Axle</b>	Single, 6,000 pound rubber Torflex axle with EZ lube hubs.
<b>Tires</b>	ST225-75R15 radial tires mounted on white spoke wheels with steel fenders.
<b>Brakes</b>	Electric Brakes with break-away actuator.
<b>Pintle Eye</b>	H.D. height adjustable pintle eye.
<b>Parking Jack</b>	Manual top wind parking jack with 5" swivel castor wheel, swings up for travel.
<b>Lighting</b>	DOT trailer lights with LED style.
<b>Drive Type</b>	Direct drive, impeller is connected directly to PTO Shaft.
<b>Impeller</b>	29-1/2" diameter suction impeller with four 3/4" thick blades.
<b>Liners</b>	Replaceable 1/4" thick abrasion resistant steel liners.
<b>Suction Inlet</b>	Rear inlet suction housing is constructed out of 1/4" thick steel.
<b>Suction Hose</b>	Urethane suction hose is 18" in diameter x 10' long and is stored to the front of the unit.
<b>Hose Boom</b>	Overhead boom is center mounted and is powered by an electric / hydraulic pump.
<b>Discharge Hose</b>	Hose is 12" diameter x 60' long metal flex hose.
<b>Paint</b>	All components are pre-painted with Sikken paint - main unit - Red color
<b>OPTIONS:</b>	
	90 degree inlet elbow for improved curbside pickup
	Remote electronic throttle for engine
	PTO safety engagement system
	Fluid drive coupler in lieu of clutch and PTO
	HD rubber 18" diameter suction hose in lieu of urethane
	Special paint

\*Specifications subject to change at any time without notice

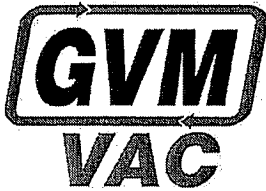

Manufactured by:  
Old Dominion Brush Co., Inc.  
Richmond, VA

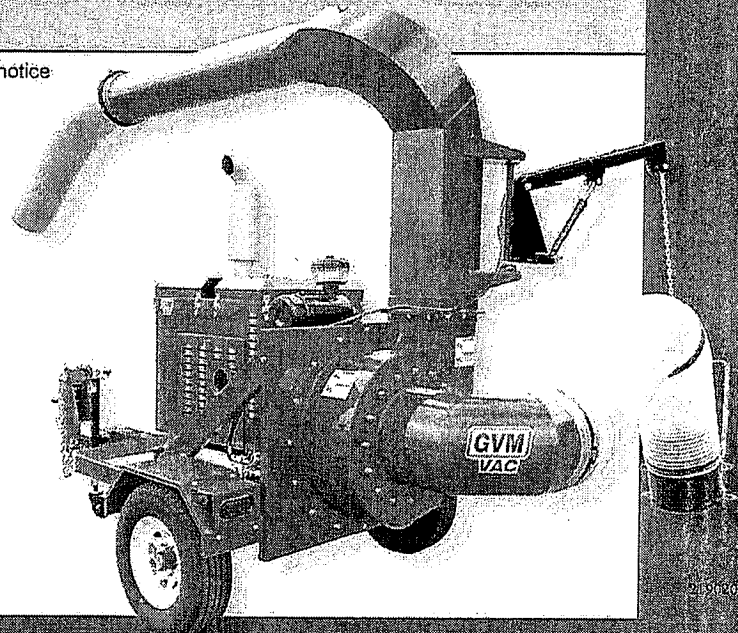

Sold and Serviced By:

**Municipal Equipment, Inc.**  
6305 Shepherdsville Road  
Louisville, KY 40228  
(502) 962-9527  
www.municipalequipmentinc.com

[www.gvm-vac.com](http://www.gvm-vac.com)

800-632-7989